

Solutions for Power Switching and Monitoring

March
1st 2021



When **energy** matters

When **energy** matters

UPS & Critical power solutions



7 solutions

- Modular UPS
- Single-phase UPS
- Three-phase UPS
- Static Transfer System (STS)
- Industrial and transformer based UPS
- UPS for special applications
- Connected services

50 years
of expertise

3 levels of protection
according to your criticality

Prime | Superior | Ultimate

3 offers

Standard | Adapted | Custom

Product Name	Rating	Item code	Product Description	LP (₹)
ITYS-E	1kVA	ITY-E-TW010B-I	1KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232 with Built-in Battery	26400
	2kVA	ITY-E-TW020B-I	2KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232 with Built-in Battery	45500
	3kVA	ITY-E-TW030B-I	3KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232 with Built-in Battery	52000
	1kVA	ITY-E-TW010LB-I	1KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	23700
	2kVA	ITY-E-TW020LB-I	2KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	40000
	3kVA	ITY-E-TW030LB-I	3KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	43700
	6kVA	ITY-E-TW060LB	6KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	82000
	10kVA	ITY-E-TW100LB	10KVA Single phase online UPS 230V 50Hz 0.8 PF, RS232, External Battery option	106000
ITYS	10kVA	ITY2-TW110XLB	10 kVA Single phase online UPS 3/1 COMBO INPUT WITH 8A SUPER POWERFUL BATTERY CHARGER 0.9 PF, RS232, External Battery option	160000
	20kVA	ITY2-TW210XLB	20 kVA Single phase online UPS 3/1 COMBO INPUT WITH 8A SUPER POWERFUL BATTERY CHARGER 0.9 PF, RS232, External Battery option	273000
	Parallel kit (optional)	ITY2-PAR10-20	Parallel KIT FOR UPS 10-20kVA COMBO 1+1	13700
NETYS RT	5kVA	NRT2-U5000C	5000VA Single phase rack-mountable online UPS 230V 50/60Hz, RS232, External Battery option	99000
	11kVA	NRT2-U11000CLAC	11000VA Single phase rack-mountable online UPS 230V 50/60Hz, RS232, External Battery option	146000
STATYS XS	16A	3310016001	Static transfer switch 16A 230V 1P 2 WIRES 2 POLE SWITCHING (19" Rack mountable)	55000
	32A	3310032001	Static transfer switch 32A 230V 1P 2 WIRES 2 POLE SWITCHING (19" Rack mountable)	100000





**Note: Online UPS available from 1kVA to 5400 kVA, Static transfer switches (STS) available up to 1800 A. For higher rating UPS & STS, send your query to info.in@socomec.com*



Load Break Switches

COMO

From 32 to 63A

Solution		OPEN EXECUTION							
		Din Rail/Black Plate				Door Mounting			
		 				 			
		Direct Handle Version		External Handle Version*		External operation Version* with screw		Quick Fix Version*	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
32A	3	21113003G	706	21113103G	644	21113203G	644	21113303G	644
63A	3	21113005G	850	21113105G	798	21113205G	850	21113305G	850

* references are only for Switch

Accessories for Din Rail/Back Plate mounting

Rating	4th Pole	LP (₹)	External handle K1 type IP65 with Guided Shaft	LP (₹)	Extension shaft	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111003G	242	21131112G (Blue/Black)	185	21132200G (200mm)	124	21134000G	304	21111056G	304
63A	21111005G	283	21131113G (Red /Yellow)		21132320G (320mm)	170				

Accessories for Door mounting

Rating	4th Pole	LP (₹)	External handle K1 type IP65 with Screw	LP (₹)	External handle K1 type IP65 - Quickfix	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111203G	242	21131322G (Blue/Black)	185	21131332G (Blue/Black)	185	21134200G	310	21111256G	310
63A	21111205G	283	21131323G (Red /Yellow)		21131333G (Red/Yellow)					

Enclosed Load Break Switches

COMO

From 20 to 125A



Pole	20A		25A		32A		40A	
	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
3Pole (Yellow/Red)	21153401G	1277	21153402G	1378	21153403G	1416	21153404G	1547
3Pole (Blue/Grey)	21153301G	1277	21153302G	1378	21153303G	1416	21153304G	1547
4Pole (Yellow/Red)	21154401G	1432	21154402G	1547	21154403G	1586	21154404G	1764
4Pole (Blue/Grey)	21154301G	1432	21154302G	1547	21154303G	1586	21154304G	1764
Pole	63A		80A		100A		125A	
	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
3Pole (Yellow/Red)	21153406G	2060	21153408G	4074	21153409G	5150	21153412G	9528
3Pole (Blue/Grey)	21153306G	2060	21153308G	4074	21153309G	5150	21153312G	9528
4Pole (Yellow/Red)	21154406G	2575	21154408G	4532	21154409G	5899	21154412G	10146
4Pole (Blue/Grey)	21154306G	2575	21154308G	4532	21154309G	5899	21154312G	10146



Load Break Switches

SIRCO

Conforms to IS/IEC 60947-3 up to AC23A¹, Front operated 3 or 4 pole 415 V, 50 Hz.

SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> • Switch • Interphase barriers from frame B3 and above • Direct Handle 		<ul style="list-style-type: none"> • Switch • Interphase barriers from frame B3 and above • External Handle • Extension Shaft 200mm 		<ul style="list-style-type: none"> • Enclosure • Switch • Interphase barriers from frame B3 and above • External Handle • Extension Shaft 		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	26K13012A	4408	26K23012A	4793	26E13012A	7057	26E10002A	1489
	160A		26K13016A	5580	26K23016A	5967	26E13016A	8542		
	200A CD		26K13019A	5795	26K23019A	6181	26E13019A	8800		
B4	200A		26K13020A	6340	26K23020A	6725	26E13020A	8959	26E10003A	2302
	250A		26K13025A	8238	26K23025A	8625	26E13025A	11687		
	315A CD		26K13030A	8303	26K23030A	8690	26E13030A	13500		
B5	400A CD		26K13039A	10325	26K23039A	10711	26E13039A	14645	26E10004A	2933
	315A		26K13031A	8872	26K23031A	9257	26E13031A	14364		
	400A		26K13040A	12329	26K23040A	12716	26E13040A	17271		
B6	500A		26K13050A	13522	26K23050A	13907	26E13050A	19025	26E13063A	20690
	630A		26K13063A	14862	26K23063A	15249	-	-		
	800A CD		26K13079A	17599	26K23079A	18243	-	-		
B7	1000A	26K13100A	33847	26K23100A	34491	26E13100A	45128	26E10006A	8627	
	1250A CD	26K13124A	38632	26K23124A	39276	-	-	-	-	
	1250A	26K13125A	46266	26K23125A	46909	26E13125A	62744	26E10007A	10933	
1600A	26K13160A	62466	26K23160A	63109	26E13160A	82699				
1800A	26K13180A	68894	26K23180A	69537	-	-				
B8	2000A	26K13200A	77555	26K23200A	78843	-	-	-	-	
	2500A	26K13250A	106963	26K23250A	108250	-	-	-	-	
	3200A	26K13320A	143463	26K23320A	144751	-	-	-	-	
B2*	63A	26K14006A	2503	26K24006A	2856	26E14006A	3946	26E10001A	875	
	100A	26K14010A	4292	26K24010A	4646	26E14010A	5644			
	125A CD	26K14011A	4696	26K24011A	5050	26E14011A	6545			
B3	160A	26K14016A	6565	26K24016A	7019	26E14016A	9266	26E10002A	1489	
	200A CD	26K14019A	6817	26K24019A	7272	26E14019A	9342			
	200A	26K14020A	7458	26K24020A	7912	26E14020A	10715			
B4	250A	26K14025A	9693	26K24025A	10147	26E14025A	12616	26E10003A	2302	
	315A CD	26K14030A	9768	26K24030A	10223	26E14030A	14750			
	400A CD	26K14039A	12147	26K24039A	12912	26E14039A	16922			
B5	315A	26K14031A	10437	26K24031A	12601	26E14031A	14798	26E10004A	2933	
	400A	26K14040A	14504	26K24040A	14959	26E14040A	20080			
	500A	26K14050A	15907	26K24050A	16362	26E14050A	22058			
B6	630A	26K14063A	17485	26K24063A	17939	26E14063A	23977	-	-	
	800A CD	26K14079A	20705	26K24079A	21462	26E14079A	-			
	1000A	26K14100A	39820	26K24100A	40578	26E14100A	52316			
B7	1250A CD	26K14124A	45449	26K24124A	46206	26E14124A	-	26E10007A	10933	
	1250A	26K14125A	54430	26K24125A	55187	26E14125A	72273			
	1600A	26K14160A	73489	26K24160A	74246	26E14160A	95280			
B8	1800A	26K14180A	81051	26K24180A	81808	-	-	-	-	
	2000A	26K14200A	91241	26K24200A	92756	-	-	-	-	
	2500A	26K14250A	125838	26K24250A	127353	-	-	-	-	
	3200A	26K14320A	168780	26K24320A	170295	-	-	-	-	

CD - Compact design

1) please refer technical literature for exact technical characteristics

* Phase Barrier & Shaft is not available in frame B2

Rating 125A & 800A are also available in AC-23A category

SIRCO Accessories



Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)
B2	42990001A	360	NA	-	26091020A	164	26092020A	271
B3	26995042A	353	14212111A	1161	26990031A	404	26990032A	475
B4	26995052A	656	14212111A	1161	26990031A	404	26990032A	475
B5	26995052A	656	14212111A	1161	26990031A	404	26990032A	475
B6*	27997012A	2618	14433111A	1802	26990031A	404	26990032A	475
B7*	27997012A	2618	14433111A	1802	26990031A	404	26990032A	475
B8*	27997012A	2618	14538111A	11350	26990031A	404	26990032A	475

* Handle for frames B6 to B8 are double arms handle



Frame	Shaft 200mm	LP (₹)	Shaft 250mm	LP (₹)	Shaft 320mm	LP (₹)
B3	14001020A	404	14001025A	515	14001032A	566
B4	14001020A	404	14001025A	515	14001032A	566
B5	14001020A	404	14001025A	515	14001032A	566
B6	14011520A	846	-	-	14011532A	1040
B7	14011520A	846	-	-	14011532A	1040
B8	27993015A	2741	-	-	27993018A	3030



Frame	Interphase barrier - 3P	LP (₹)	Interphase barrier - 4P	LP (₹)	Spreaders - 3P	LP (₹)	Spreaders - 4P	LP (₹)
B2	-	-	-	-	-	-	41064012A	345
B3	29985033A	166	29985034A	239	41063016A	330	41064016A	447
B4	29985023A	196	29985024A	285	41063025A	492	41064025A	669
B5	29985013A	227	29985014A	330	41063040A (400A)	667	41064040A (400A)	906
B5	-	-	-	-	41063050A (500A)	883	41064050A (500A)	1074
B5	-	-	-	-	41063063A (630A)	1788	41064063A (630A)	2385



Frame	Terminal Shroud - 3P	LP (₹)	Terminal Shroud - 4P	LP (₹)	Terminal Screen Standard - 3P	LP (₹)	Terminal Screen Standard - 4P	LP (₹)
B2	-	-	29944008A	289	-	-	-	-
B3	26943014A	614	26944014A	716	26983012A	486	26984012A	550
B4	26943021A	682	26944021A	818	26983020A	486	26984020A	550
B5	26943051A	1091	26944051A	1227	26983050A	622	26984050A	705
B6	-	-	-	-	26983080A	1248	26984080A	1415
B7	-	-	-	-	26983120A	1851	26984120A	2098
B8	-	-	-	-	26983200A	3324	26984200A	3766



Frame	Terminal Screen Wide - Top - 3P	LP (₹)	Terminal Screen Wide - Bottom - 3P	LP (₹)	Terminal Screen wide Top/Bottom - 4P	LP (₹)
B3	26983013A	583	26988013A	583	26984013A	661
B4	26983021A	583	26988021A	583	26984021A	661
B5	26983051A	746	26988051A	746	26984051A	846
B6	26983081A	1498	26988081A	1498	26984081A	1698

Manual Transfer Switching Equipment

63A to 3200A



NEW SIRCOVER

MORE

RELIABLE | SECURE | ROBUST
ADAPTABLE | FLEXIBLE | DURABLE

 **socomec**
Innovative Power Solutions



Manual Transfer Switching Equipment

SIRCOVER

Conforms to IEC 60947-6-1 up to AC33B¹, IS/IEC 60947-3 up to AC-23A¹,
Front operated 3 or 4 pole 415 V, 50 Hz.

SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extention Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> • Transfer switch • Direct handle • Bridging Bars up to 1600 A • Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> • Transfer switch • Bridging Bars up to 1600 A • Extended handle • 200 mm shaft • Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> • Transfer switch • Extended handle • Bridging Bars up to 1600 A • Extension shaft • Interphase barriers from frame B3 and above 		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	41K13013A	8852	41K23013A	9089	41E13013A	12614	41E10002A	2640
	160A		41K13016A	9535	41K23016A	9941	41E13016A	13835		
	200A		41K13020A	11587	41K23020A	11991	41E13020A	15886		
	250A		41K13025A	16889	41K23025A	17294	41E13025A	21981		
B4	315A		41K13031A	17851	41K23031A	18255	41E13031A	22971	41E10003A	2821
	400A		41K13040A	26259	41K23040A	26664	41E13040A	33593		
B5	500A		41K13050A	28175	41K23050A	29639	41E13050A	36295	41E10005A	4453
	630A		41K13063A	30965	41K23063A	31371	41E13063A	38840		
B6	CD800A	41K13079A	41884	41K23079A	42289	-	-	-	-	
	1000A	41K13100A	79436	41K23100A	80112	41E13100A	102540	41E10006A	9901	
B7	1250A	41K13120A	106108	41K23120A	106784	41E13120A	142479	41E10007A	31169	
	1600A	41K13160A	124325	41K23160A	125000	41E13160A	193202			
B8	2000A	41K13200A	194575	41K23200A	195925	41E13200A	249212	41E10008A	40118	
	2500A	41K13250A	259622	41K23250A	260973	41E13250A	331492			
B2*	3200A	41K13320A	355640	41K23320A	356991	41E13320A	433777	-	-	
	63A	41K14006A	4683	41K24006A	4990	41E14006A	7509	41E10001A	1797	
B3	100A	41K14010A	6294	41K24010A	6574	41E14010A	9572	41E10002A	2640	
	CD125A	41K14011A	8120	41K24011A	8611	41E14011A	11914			
B4	125A	41G14013A	9743	41G24013A	9904	41E14013A	14217	41E10003A	2821	
	160A	41G14016A	10597	41G24016A	10993	41E14016A	15590			
B5	200A	41G14020A	12877	41G24020A	13392	41E14020A	18002	41E10004A	4158	
	250A	41G14025A	18586	41G24025A	19313	41E14025A	25032			
B6	315A	41G14031A	19837	41G24031A	20189	41E14031A	26193	41E10005A	4453	
	400A	41G14040A	29182	41G24040A	29778	41E14040A	38298			
B7	630A	41G14063A	34078	41G24063A	34693	41E14063A	44375	-	-	
	CD800A	41G14079A	47450	41G24079A	49278	-	-	-	-	
B8	1000A	41K14100A	86581	41K24100A	87745	41E14100A	116677	41E10006A	9901	
	1250A	41K14120A	115653	41K24120A	116959	41E14120A	161322	41E10007A	31169	
B9	1600A	41K14160A	136823	41K24160A	138240	41E14160A	215261	41E10008A	40118	
	2000A	41K14200A	206939	41K24200A	208375	41E14200A	283787	-	-	
B10	2500A	41K14250A	282975	41K24250A	285841	41E14250A	377546	-	-	
	3200A	41K14320A	387629	41K24320A	391008	41E14320A	496775	-	-	

NEW SIRCOVER


CD - Compact Design

1) please refer technical literature for exact technical characteristics

* Phase Barrier & Shaft is not available in B2

Rating 800A is also available in AC-33A category

*Old Sircover from 125A-CD800A are available till stock last

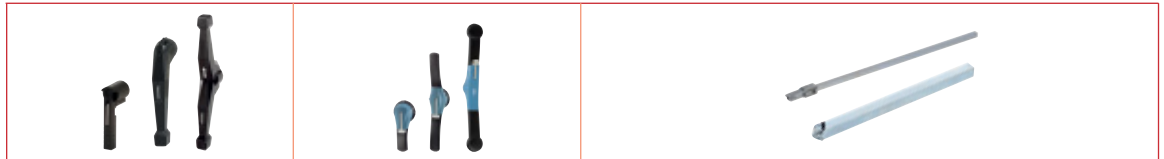

Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990002A	438	-	-	-	-	-	-
B3	41995012A	875	14212113A	1390	14001021A	404	14001033A	566
B4	41995012A	875	14212113A	1390	14001021A	404	14001033A	566
B5	41995012A	875	14212113A	1390	14001021A	404	14001033A	566
B6*	27997052A	2265	14433113A	3346	14011520A	846	14011532A	1040
B7*	27997052A	2265	14433113A	3346	14011520A	846	14011532A	1040
B8*	27997012A	2618	14538113A	8090	27993015A	2741	27993018A	3030

* double arms handle



Frame	Interphase barrier 3P	LP (₹)	Interphase barrier 4P	LP (₹)	1st or 2nd Aux Contact (1 NO/NC)	LP (₹)	Interlock Kit*	LP (₹)
B2	-	-	-	-	42091030A	515	42590002A	669
B3	29985036A	337	29985039A	489	41090021A	535	42590003A	669
B4	29985026A	401	29985029A	581	41090021A	535	42590003A	669
B5	29985016A	465	29985019A	674	41090021A	535	42590003A	669
B6	-	-	-	-	41090021A	535	-	-
B7	-	-	-	-	41090021A	535	-	-
B8	-	-	-	-	41090021A	535	-	-

* for external operation of Kit 1, interlock kit can be used

* for using Interlock kit in K2, direct handle to be ordered extra

NEW

Rating	Old changeover switch (COF)		Retrofit Solutions	
	Reference	Switch Reference	Kit Reference	LP (₹)
125A	GC01 254POI	41G1 4013A	41RT 4020A	1950
160A	GC01 604POI	41G1 4016A	41RT 4020A	1950
200A	GC02 004POI	41G1 4020A	41RT 4020A	1950
250A	GC02 504POI	41G1 4025A	41RT 4031A	2250
315A	GC03 204POI	41G1 4031A	41RT 4031A	2250
630A	GC06 304POI	41G1 4063A	41RT 4061A	3250

* for 400 A, please consult us.

* above list price is only for retrofit kit, for switch prices please refer page no. 6


* To replace Socomec old changeover (COF), use **RETROFIT KIT** along with the NEW SIRCOVER with direct



Sircover Bypass

Conforms to IS/IEC 60947-3 AC-23A¹, front operated 4 pole 415 V, 50 Hz.

SIRCOVER BYPASS Accessories

SOLUTION		OPEN EXECUTION	
Standard Configuration Includes		SIRCOVER BYPASS	
		 <ul style="list-style-type: none"> • Switch • Interphase barrier • External Handle • Bridging Bars • Shaft 200mm 	
Rating	Poles	Reference	LP (₹)
125A	4P	41K29013A	16758
160A		41K29016A	18491
200A		41K29019A	21004
250A		41K29025A	30357
400A		41K29039A	46092
500A		41K29050A	52939
630A		41K29063A	53004
800A		41K29080A	118666
1000A		41K29100A	169052
1250A		41K29120A	189814
1600A		41K29160A	250499

1) Please refer technical literature for exact characteristics

Sircover Bypass

Rating									
	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)	1st Aux Contact (1NO/NC)	LP (₹)	
125A	14212113A	1390	14001020A	404	14001032A	566	41090021A	535	
160A	14212113A	1390	14001020A	404	14001032A	566	41090021A	535	
200A	14212113A	1390	14001020A	404	14001032A	566	41090021A	535	
250A	14333113A	2669	14011520A	846	14011532A	1040	41090021A	535	
400A	14333113A	2669	14011520A	846	14011532A	1040	41090021A	535	
500A	14333113A	2669	14011520A	846	14011532A	1040	41090021A	535	
630A	14333113A	2669	14011520A	846	14011532A	1040	41090021A	535	
1250A	41997146A	2669	27993015A	2741	27993018A	3030	41090021A	535	
1600A	41997146A	2669	27993015A	2741	27993018A	3030	41090021A	535	

When it comes to transfer switching equipment, opt for reliability



from 40 to 6300 A



ATyS: a complete range of transfer switching equipment for every application from 40 to 6300 A

ATyS is remotely operated or fully automatic transfer switching equipment (TSE) assures the continuity of power to a load in a safe and reliable way.

- **Wider range of ATyS** products for different applications. With or without dual power supply, ATS controller, Communication, Software and more.
- **Tested in full compliance** with IEC 60947-6-1 & IEC 60947-3.
- **Unique lateral movement design** with self cleaning contacts ensure high performance and power availability.
- **Wide band control voltage** 166 - 332 V for motor.
- **Self diagnostic watchdog relay** for the motor and controller.
- **3-positions (I-0-II) pad lockable** with 100% manual on-load transfer feasibility with operating handle.



Safe



Plug & play



Robust



Easy maintenance

To find out more:



24/7 ExpertCare Center
1800 203 0456



www.socomec.co.in

socomec
Innovative Power Solutions





SOCOMECA INDIA PRIVATE LIMITED · 756, Pace City - II Sector 37 Gurgaon -122002, Haryana, India
Tel. +91 44 3921 5466 · Mobile : +91 9711229993 · Email: info.in@socomec.com · CIN: U00000HR1999PTC038504







Remote & Automatic operated transfer switches

ATyS

Conforms to IEC 60947-6-1, IS/IEC 60947-3, 4 pole

SOLUTION		Remotely Operated							
		ATyS S		ATyS Sd		ATyS S 12Vdc		ATyS S 24Vdc	
Standard Configuration Includes									
		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars • Dual Power Supply 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	95034004SL	20132	95134004SL	22347	95054004SL	20132	95064004SL	20132
63A		95034006SL	21254	95134006SL	23363	95054006SL	21048	95064006SL	21048
80A		95034008SL	22878	95134008SL	25395	95054008SL	22878	95064008SL	22878
100A		95034010SL	25874	95134010SL	28442	95054010SL	25623	95064010SL	25623
125A		95034012SL	27722	95134012SL	30474	95054012SL	27453	95064012SL	27453

SOLUTION		Remote Operated		Automatic Transfer Switch Equipment (ATSE)					
		ATyS d M		ATyS t M		ATyS g M		ATyS p M	
Image = 4P B4 Frame									
Standard Configuration Includes		<ul style="list-style-type: none"> • Switch • Handle • Aux Contact 		<ul style="list-style-type: none"> • Switch • Handle 		<ul style="list-style-type: none"> • Switch • Handle 		<ul style="list-style-type: none"> • Switch • Handle 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	93234004G	36063	93444004G	37466	93544004G	55498	93644004G	On Request
63A		93234006G	38392	93444006G	39577	93544006G	58113	93644006G	On Request
80A		93234008G	40872	93444008G	41687	93544008G	60591	93644008G	On Request
100A		93234010G	41004	93444010G	42743	93544010G	60725	93644010G	On Request
125A		93234012G	46238	93444012G	47228	93544012G	65958	93644012G	On Request
160A		93234016G	55613	93444016G	57518	93544016G	75333	93644016G	On Request

* Please consult us, for 2Pole ATyS M

* These products are DIN rail mountable, please refer to catalogue for more information



Remote & Automatic operated transfer switches

ATyS

Conforms to IEC 60947-6-1, IEC 60947-3, 4 pole

SOLUTION		Remotely Operated		Automatically operated					
		ATyS r		ATyS t		ATyS g		ATyS p	
Standard Configuration Includes									
		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A • Voltage Sensing Kit 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A • Voltage Sensing Kit 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A • Voltage Sensing Kit 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
125A	4P	95234012SL	51216	95434012SLVR	79291	95534012SLVR	98182	95734012SLVR	On Request
160A		95234016SL	52528	95434016SLVR	87009	95534016SLVR	106174	95734016SLVR	On Request
200A		95234020SL	53777	95434020SLVR	93346	95534020SLVR	115948	95734020SLVR	On Request
250A		95234025SL	67091	95434025SLVR	101698	95534025SLVR	125721	95734025SLVR	On Request
315A		95234031SL	68131	95434031SLVR	111269	95534031SLVR	137008	95734031SLVR	On Request
400A		95234040SL	84773	95434040SLVR	120841	95534040SLVR	148294	95734040SLVR	On Request
500A		95234050SL	91014	95434050SLVR	136876	95534050SLVR	167444	95734050SLVR	On Request
630A		95234063SL	107657	95434063SLVR	152910	95534063SLVR	186594	95734063SLVR	On Request
800A		95234080SL	146859	95434080SLVR	212666	95534080SLVR	259898	95734080SLVR	On Request
1000A		95234100SL	177347	95434100SLVR	219218	95534100SLVR	265282	95734100SLVR	On Request
1250A		95234120SL	219993	95434120SLVR	256207	95534120SLVR	309860	95734120SLVR	On Request
1600A		95234160SL	273041	95434160SLVR	330299	95534160SLVR	395571	95734160SLVR	On Request
2000A		95234200G	398702	95434200VR	423844	95534200VR	495671	95734200VR	On Request
2500A		95234250G	440679	95434250VR	466394	95534250VR	544177	95734250VR	On Request
3200A		95234320G	566552	95434320VR	593986	95534320VR	689656	95734320VR	On Request

Please contact us for 3Pole ATyS range

* For rating 4000A to 6300A - Prices are available on request

ATyS Accessories



References	Description	LP (₹)
95992010G	HMI ATyS D10 compatible with ATyS d, t, g, p	6524
95992020G	HMI ATyS D20 compatible with ATyS p, ATyS p M	7340
16000015	ATS CONTROLLER ATyS A15 for RTSE products	17325
16000025	ATS CONTROLLER ATyS C25 for RTSE products	23625
13094006G	Bridging bars 40A - 125A for ATyS M	3732
13094016G	Bridging bars 160A for ATyS M	7179
13091001G	1st Auxiliary contact 40 - 160 A for ATyS M with 1 C/O contact for position I,0&II	3682
13994006G	Voltage sensing tap for ATyS M	3071
22944016G	Terminal Shrouds for ATyS M	724
48250204G	Ethernet Module with RS 485 for ATyS p/DirisA40/41(MODBUS gateway & with Embedded Webserver)	32203
48250203G	Ethernet Module for ATyS p/Diris A40/41 (MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	16138
48250092G	RS 485 Modbus Communication for ATyS p/Diris A40/41	4197
15992001G	2 Inputs/ Output modules for ATyS p	7611
15994001G	Dual Power Supply for ATyS S & ATyS r	12155

* For high-end controller please contact us



SO expert



www.socomec.co.in

Optimise your energy performance with Socomec

Metering

Measurement and monitoring multi-circuit system
DIRIS Digiware



Single-circuit energy meters
COUNTIS E



Measure

Measurement and monitoring multi-circuit system
DIRIS Digiware




Single-circuit measurement units
DIRIS A



Single & Three phase energy meters
COUNTIS M



Electrical network analyser
DIRIS Q800



Centralise/ Monitor/ Analyse

Communication gateway
DIRIS G



Energy management software
WEBVIEW



24/7 ExpertCare Center
1800 203 0456



www.socomec.co.in

socomec
Innovative Power Solutions

Measurement and energy management



COUNTIS (LCD Display)



References	Description	LP (₹)
48503019G	COUNTIS E00 1PH,Direct 32A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display	5985
48503039G	COUNTIS E03 1PH,Direct 40A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display with MODBUS	7857
48503000G	COUNTIS E10 1PH Direct 63A,Active Energy Meter with pulse output	8602
48503001G	COUNTIS E11 1PH Direct 63A,Dual tariff, Active Energy Meter with pulse output	9173
48503043G	COUNTIS E13 1PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	18564
48503047G	COUNTIS E17 1PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	30997
48503003G	COUNTIS E20 3PH Direct 63A,Active Energy Meter with pulse output	13163
48503004G	COUNTIS E21 3PH Direct 63A Dual tariff, Active Energy Meter with pulse output	14177
48503050G	COUNTIS E23 3PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	24762
48503054G	COUNTIS E27 3PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	41765
48503005G	COUNTIS E30 3PH Direct 100A,Active Energy Meter with pulse output	16894
48503006G	COUNTIS E31 3PH Direct 100A Dual tariff, Active Energy Meter with pulse output	17199
48503012G	COUNTIS E33 3PH Direct 100A,Dual tariff, Active Energy Meter with MODBUS	26717
48503008G	COUNTIS E40 3PH Active Energy Meter via CT/5A upto 6000 A	11737
48503009G	COUNTIS E41 3PH Dual Tariff Active Energy Meter via CT/5A upto 6000 A	12982
48503017G	COUNTIS E43 Dual Tariff Active Energy Meter via CT/5A upto 6000 A & with RS485	23320
48503016G	COUNTIS E63 3x1PH Direct 100A ,Active Energy Meter & with RS485	26880
48530000G	COUNTIS Eci2 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs	24915
48530001G	COUNTIS Eci3 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs+ 2 Analog inputs	28649



COUNTIS 'M' Series

References	Description	LP (₹)
48C03018G	Countis M03 : 45A direct - with Modbus communication via RS485; I,V,P,Q,S ,PF & 2Pulse Output	5350
48C03019G	Countis M13 : 100 A direct - with MODBUS communication via RS485; I,V,P,Q,S ,PF & 2Pulse Output	5500
48C03020G	Countis M33 : 100 A direct - with MODBUS communication via RS485; I,V,P,Q,S ,PF,load curves and THD & 2Pulse Output	8435
48C03021G	Countis M43 : CT 5A input with RS485 MOSBUS communication; I,V,P,Q,S ,PF,load cuves and THD & 2Pulse Output	9350



Measurement and energy management

DIRIS (with LCD multiline display with accuracy class upto 0.5s)



References	Description	LP (₹)
48250010G	DIRIS A10 W/O RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	13278
48250011G	DIRIS A10 With RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	16074
48250402G	DIRIS A20, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, max kW, kVA, kVAR, THDi & V up to 50th row	14021
48250080G	1 OUT A20 module	3317
48250082G	RS485 A20 module	3438
48250403G	DIRIS A30, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63rd row, 3ph current bar graph	16779
48250500G	Diris A40 RS485, 3I 2O, CI 0.2, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63rd row, PQM Device for Voltage Sag, Swell & Current rise recordings	36036
48250501G	Diris A40 Ethernet, 3I 2O, CI 0.2, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63rd row, PQM Device for Voltage Sag, Swell & Current rise recordings, webserver function inbuilt	43130
48250502G	Diris A40 Profibus, 3I 2O, CI 0.2, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63rd row, PQM Device for Voltage Sag, Swell & Current rise recordings	44415
48250202G	DIRIS A41, features same as DIRIS A30 + actual neutral current measurement through 4th CT	32185
48250207G	DIRIS A 60, features same as DIRIS A30 + PQM Device for Voltage Sag, Swell & Current rise recordings	62064
48250090G	2 Pulse A30/A41 module	3293
48250092G	RS 485 Modbus Communication for ATyS p/Diris A30/A41	4197
48250093G	2 0/4-20mA Analog Output module A30/A41	8449
48250094G	2IN/2OUT A30/A41 module for alarm/trip purposes for Max V, I, F, P, Q, S, Temp, THD, V & I parameters	6106
48250097G	MEMORY A30/A41 module with RTC & with storage for P+, P-, Q+, Q-, last Max/Min values for V, I, F, P, Q, THD, V & I	13026
48250203G	Ethernet Module for ATyS p/Diris A30/A41 (MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	16138
48250204G	Ethernet Module with RS 485 for ATyS p/Diris A30/A41 (MODBUS gateway & with Embedded Webserver)	32203
48250205G	PROFIBUS-DP A30 module	15830
48250206G	Temperature module - Temp indication (Internal+3 External sensors PT 100)	14835

* Upto max 4 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

** Upto max 3 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

DIRIS G

RS 485 to Ethernet communication gateways

References	Description	LP (₹)
48290300	Diris G 30 RS485/Ethernet - Webview Power Monitoring	On request
48290302	Diris G 50 RS485/Ethernet - Webview Power & Energy Monitoring	On request

DIRIS Q800



References	Description	LP (₹)
48260100	Diris Q800 Electrical network analyser with 192 x 144 mm color touchscreen for power quality/flicker/transient measurements/current waveform/Fresnel diagram	On request

DIRIS Digiware

Measurement and monitoring system for electrical installations



MONITORING DEVICES & MODULES

References	Description	LP (₹)
48290010	DIRIS B-10 RS485-MODBUS-230VAC	On request
48290000	DIRIS B-30 RS485-MODBUS-230VAC	
48290030	DIRIS O-iod DIGITAL MODULE	
48290031	DIRIS O-ioa 0/4-20mA MODULE	
48290032	DIRIS O-it TEMPERATURE MODULE	
48290033	DIRIS O-m MODBUS RS485 MODULE	
48290034	DIRIS O-p PROFIBUS DP MODULE	
48290035	DIRIS O-b/ip BACNET MODULE	
48290036	DIRIS O_b/mstp BACNET MODULE	



POWER SUPPLY

References	Description	LP (₹)
48290120	P15 AUX SUPPLY 100-240VAC->24 VDC 15W	On request
47290603	P30 AUX SUPPLY 100-240VAC->24 VDC 30W	

DIRIS G GATEWAY

References	Description	LP (₹)
48290300	DIRIS G-30 RS/ETH MONITORING	On request
48290302	DIRIS G-50 RS/ETH MONIT+REPORT	



DISPLAY

References	Description	LP (₹)
48290200	DIRIS D-30 Single-point display	On request
48290199	DIRIS D-40 Multi-point display - RS485 output	
48290204	DIRIS D-50 Multi-point display - Ethernet output - Dual channel input(Digibus & modbus)	
48290203	DIRIS D-70 Multi-point display - Webview Webserver - Ethernet output	



BLIND INTERFACE & REPEATER

References	Description	LP (₹)
48290101	C-31 SYSTEM INTERFACE	On request
48290103	C-32 REPEATER	




VOLTAGE SENSING MODULE

References	Description	LP (₹)
48290105	U-10 VOLTAGES INPUTS METERING	On request
48290106	U-20 VOLTAGES INPUTS MONITORING	
48290102	U-30 VOLTAGES INPUTS ANALYSIS	

CLOSED TYPE CURRENT SENSOR

References	Description	LP (₹)
48290500	TE-18 20A SOLID CORE	On request
48290501	TE-18 63A SOLID CORE	
48290502	TE-25 160A SOLID CORE	
48290503	TE-35 250A SOLID CORE	
48290504	TE-45 630A SOLID CORE	
48290505	TE-55 1000A SOLID CORE	
48290506	TE-90 2000A SOLID CORE	



OPEN TYPE CURRENT SENSOR

References	Description	LP (₹)
48290551	TR-10 75A/100MV SPLIT CORE	On request
48290552	TR-16 100A/100MV SPLIT CORE	
48290553	TR-24 200A/100MV SPLIT CORE	
48290554	TR-36 600A/100MV SPLIT CORE	





Measurement and energy management

CURRENT SENSING MODULE



References	Description	LP (₹)
48290110	I-30 3xl METERING	On request
48290111	I-31 3xl METERING + TREND	
48290112	I-60 6xl METERING	
48290113	I-61 6xl METERING + TREND	
48290128	I-33 3xl MONITORING	
48290130	I-35 3xl ANALYSIS	
48290129	I-43 4xl MONITORING 2I/2O	
48290131	I-45 4xl ANALYSIS 2I/2O	

FLEXIBLE CURRENT SENSOR



References	Description	LP (₹)
48290570	TF-55 600A ROGOWSKI	On request
48290571	TF-120 2000A ROGOWSK	
48290572	TF-300 6000A ROGOWSKI	

RJ45 CABLES



References	Description	LP (₹)
48290181	RJ45-0.32 feet / 0.10m CABLE	On request
48290188	RJ45-0.64 feet / 0.20m CABLE	
48290182	RJ45-1.64 feet / 0.50m CABLE	
48290183	RJ45-3.28 feet / 1m CABLE	
48290184	RJ45-6.56 feet / 2m CABLE	
48290186	RJ45-16.4 feet / 5m length CABLE	
48290187	RJ45-32.8 feet / 10m length CABLE	
48290185	RJ45 cables for BUS Digiware 164 feet / 50 m + 50 connectors	

RJ12 CABLES



References	Description	LP (₹)
48290580	RJ12 3x0.1m CABLE	On request
48290581	RJ12 3x0.2m CABLE	
48290582	RJ12 3x0.3m CABLE	
48290583	RJ12 3x1m CABLE	
48290584	RJ12 3x2m CABLE	
48290585	RJ12 4x0.1m CABLE	
48290586	RJ12 4x0.2m CABLE	
48290587	RJ12 4x0.3m CABLE	
48290588	RJ12 4x1m CABLE	
48290589	RJ12 4x2m CABLE	
48290590	RJ12 6x0.1m CABLE	
48290591	RJ12 6x0.2m CABLE	
48290592	RJ12 6x0.3m CABLE	
48290593	RJ12 6x1m CABLE	
48290594	RJ12 6x2m CABLE	
48290595	RJ12 3x0.5m CABLE	
48290596	RJ12 4x0.5m CABLE	
48290597	RJ12 6x0.5m CABLE	
48290602	RJ12 1 cable of 16.6ft/5m	
48290603	RJ12 1 cable of 32.8ft/10m	
48290601	RJ12 1 Cable of 164ft/50m and 50 connectors	

ACCESSORIES

References	Description	LP (₹)
48290049	SEALING KIT DIRIS B30	On request
48290050	USB CONFIGURATION CABLE	
48290180	END LINE RESISTANCE RJ45	
48290598	SPLICE PLATE x30	
48290599	CT/5A to 100 MV ADAPTOR	
48290600	SEALABLE COVER x20	
48290280	RJ9 1x1,5m	
48290281	RJ9 1x3m	




Discontinued Products

Available till stock lasts


Load Break Switches (LBS)

Conforms to IS/IEC 60947-3 AC-23A1,
Front operated 4 pole 415 V, 50 Hz

SOLUTION		OPEN EXECUTION	
Standard Configuration Includes		 <ul style="list-style-type: none"> • Switch • Inter Phase Barriers ≥800A • Direct Handle • Door Interlock • 1st Aux Contact ≥250A 	
250A	4P	GL02504POI	11604
320A		GL03204POI	12495
400A		GL04004POI	17365
630A		GL06304POI	20932
1000A		GL10004POI	47670
2000A		GL20004POI	109228


Changeover switches (COS)

Conforms to IS/IEC 60947-3, AC-23A1,
Front operated 4 pole 415 V, 50 Hz

SOLUTION		OPEN EXECUTION	
Standard Configuration Includes		Switch	
		 <ul style="list-style-type: none"> • Switch • Handle • Bridging Bars • Door Interlock Assembly • Phase Barrier ≥800A • 1st Aux Contact ≥ 250A 	
Rating	Poles		
630A	4P	GC06304POI	44252
1000A		GC10004POI	107604
1250A		GC12504POI	143430
1600A		GC16004POI	169529

Bypass changeover switches (BPCOS)

Conforms to IS/IEC 60947-3 AC-23A1, Front operated 4 pole 415 V, 50 Hz

SOLUTION		OPEN EXECUTION	
Standard Configuration Includes		Switch	
		 <ul style="list-style-type: none"> • Switch • Inter Phase Barriers ≥800A • Direct Handle • Bridging Bars • 1st Aux Contact ≥250A 	
Rating	Poles		
250A	4P	GBP02504POI	30357
1250A		GBP12504POI	189814
1600A		GBP16004POI	250499

MULTIS "m" Series(LED/LCD display)



References	Description	LP (₹)
192J9013G	Multis Vm15 1ph, 1L, CL1 Prg	1173
192J9014G	Multis Vm15 1ph, 1L, CL1	1020
192J9103G	Multis Lm42 LCD AC Kwh CL1	3621
192J9111G	Multis Lm45 3Ph/3L MFM CL1	7650
192J9112G	Multis Lm46 3Ph/3L MFM CL1 Com	8486
192J9113G	Multis Lm42 LCD AC-Kwh CL1 Com	4307
192J9200G	Multis L55 MFM THD CL1 Com	14053

SOCOMEK India

General terms and conditions

1. PRICES

All Prices are mentioned in Indian Rupees. Prices are subjected to change without any prior notice will be applicable as prevailing at the time of Dispatch. This Price list is effective from March 1st 2021 and supersedes any previous price list.

2. TAXES & DUTIES

The prices are exclusive of all taxes

We will charge applicable Goods and Services Tax ('GST') on our supplies

In the event of variations in rate of tax, rules and/or method of assessment under the GST, the prices will be adjusted accordingly.

It will be the responsibility of customer to communicate its correct GSTIN to the Company. Company will not be responsible in case incorrect GSTIN is communicated to us and tax is deposited by us on GSTIN available in Company's record

3. WARRANTY

The Company warrants the goods against all proven defects or hidden defects in design and manufacturing. The period of warranty is 12 months from date of invoicing or 18 months from date of manufacturing. The warranty shall be strictly limited to Socomec products and does not extend to the equipment within which these products may be integrated or not to the performance of such equipment. The Company's warranty shall be limited, in its discretion, to the repair or replacement at its expense in its factory of all part of the goods recognized as defective. Defective items replaced free of charge shall be made available to the company and shall become its property. The warranty shall not be applicable.

- 3.1 In the event that the defect if due to the material supplied by the buyer, or due to design imposed by it.
- 3.2 In the event of damage or accident due to the transport or arising from negligence, defective installation, supervision or maintenance by the buyer or a third party.
- 3.3 In the event of use, installation or storage of the goods in abnormal conditions which are not in compliance.
- 3.4 In the event of any changes, adjustments or repairs carried out by buyer without express agreement of the company.

The warranty does not cover the replacement or repair of the items which are due to the fault of the buyer or third party.

Our Service Partners



Socomec: our innovations supporting your energy performance

1 independent manufacturer

3,600 employees
worldwide

10 % of sales revenue
dedicated to R&D

400 experts
dedicated to service provision

Your power management expert



POWER
SWITCHING



POWER
MONITORING



POWER
CONVERSION



ENERGY
STORAGE



EXPERT
SERVICES

The specialist for critical applications

- Control, command of LV facilities
- Safety of persons and assets
- Measurement of electrical parameters
- Energy management
- Energy quality
- Energy availability
- Energy storage
- Prevention and repairs
- Measurement and analysis
- Optimisation
- Consultancy, commissioning and training

A worldwide presence

12 production sites

- France (x3)
- Italy (x2)
- Tunisia
- India
- China (x2)
- USA (x3)

28 subsidiaries and commercial locations

- Algeria • Australia • Belgium • China • Canada
- Dubai (United Arab Emirates) • France • Germany
- India • Indonesia • Italy • Ivory Coast • Netherlands
- Poland • Portugal • Romania • Serbia • Singapore
- Slovenia • South Africa • Spain • Switzerland
- Thailand • Tunisia • Turkey • UK • USA

80 countries

where our brand is distributed

Manufacturing facility

Socomec India Private Limited.
756 Pace City II
Sector 37
Gurgaon - 122 001
Haryana
Tel: +91 124 4562700, 4597803
Fax: +91 124 4562733
CIN: U00000HR1999PTC038504

Regional & resident offices

Ahmedabad : +91 8939008184, +91 9727753931
Bengaluru : +91 9886323448, +91 9972578171
Chennai : +91 9940147003 +91 9176611256
Cochin : +91 8939550688, +91 9745012322
Coimbatore : +91 8939550688, +91 9500092236
Hyderabad : +91 9642528800, +91 9959444277
Indore : +71 9827674469

Kolkata : +91 7550078077, +91 8697709095
Mumbai : +91 9987052602, +91 8879791802
New Delhi : +91 9953595413, +91 9958591713
Pune : +91 8793144968, +91 9032836213
Trivandrum : +91 9032836213
Vadodara : +91 9099947988
Vijaywada : +91 9032836213



SOCOMEK INNOVATIVE POWER SOLUTION PVT. LTD.

B1, II Floor
Thiru-Vi-Ka Industrial Estate
Guindy, Chennai - 600 032
Tel: +91 44 3921 5400 / 5423 / 5466
Mob: +91 9711229993, +91 9940633654
info.in@socomec.com

YOUR DISTRIBUTOR / PARTNER

www.socomec.co.in

